

Fiber receptacle  
type FC-SMA-905  
High Power Connector (5° polish)

Thrust and tension screw (3x120°)  
for tilt adjustment  
with hex key wrench size 1.5mm  
50HD-15 ①

clamp screws  
for accessory optics (3x120°)  
using hex-key size 1.5mm  
50HD-15 ①

Thrust screw M3 max.torque 50Ncm

Tension screw M2 max.torque 40Ncm


clamp screws for locking optics position (2x120°)  
using hex-key size 1.5mm  
50HD-15 ①

adjustment of focus setting  
using eccentric-key 55EX-5 ②

Tools for assembly and adjustment

hex-key  
size 1.5mm  
50HD-15

eccentric-key  
55EX-5

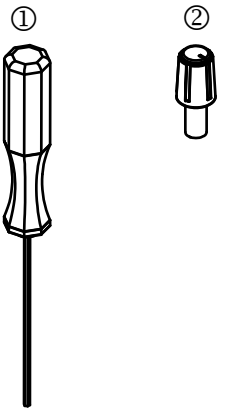

! Don't touch any other screws !

		Allgemein- toleranz ISO 2768 - f		Maßstab: 2:1	
		60FC-SMA-T-23-f'4.5-25			
		Datum	Name	Fiber collimator f'4.5-25mm	
		Bearb. 30.11.2016	TP		
		Gepr.			
		Norm		Fiber receptacle type FC-SMA-905 High Power Connector (5° polish)	
			Schäfter&Kirchhoff		Blatt A3
			OPTO-SENSORIK UND MESSTECHNIK		
			OPTIK-ENTWICKLUNG/ELEKTRONIK/SORTIERTECHNIK/OPTIKFIBRE		Blatt: 2
Zust.	Änderungen	Datum	Name	Datei: 980312235600.idw	Modell: 980312235600.iam