

5AN-2.5-V-08

Anamorphic beam-shaping optics with form factor 0.4



FEATURES

Anamorphic optics transform a collimated laser beam with elliptical cross section into a circular beam or vice versa.

- Form factor 0.4
- Wavelength range: 980 - 1550 nm
- Integrated astigmatism correction
- No lateral beam shift or beam deviation as with anamorphic prism pairs
- Clear aperture: Ø 5 mm
- Diffraction-limited optics pair
- Ø 19.5 mm system mount: Full integration with - multicube™ system / 30 mm cage system, collimators and adapters
- Discontinued

This product has been discontinued. Requests will be managed according to the residual stock. Contact us to discuss any specific need.

DESCRIPTION

A circular beam profile may be preferred over the elliptical profile usually provided by laser diodes or by tapered amplifiers. Anamorphic Beam-shaping Optics act one-dimensionally on the profile of the collimated beam. They can be used to


- Adjust the larger beam diameter to the dimension of the smaller one, producing a radially symmetric beam
- Adjust the smaller beam diameter to the dimension of the larger one, producing a radially symmetric beam
- Transform a circular beam into an elliptical beam
- Enlarge one elliptical axis to produce a beam with a higher axis ratio

The Anamorphic Beam-shaping Optics type 5AN are cylinder lens systems and, therefore, can be additionally used to correct the [astigmatic difference](#) ΔA s of the laser diode or tapered amplifier through a refocusing of the optical system. [Coupling efficiencies to single-mode fibers](#) of 80% or more are possible when using Anamorphic Beam-shaping Optics (depending on the beam characteristics of the laser diode or tapered amplifier).

Form Factor

The anamorphic effect is described by the form factor F, which indicates the relative diameter change of the parallel beam.

The target value is calculated from the ratio the beam diameters \varnothing_{\perp} and \varnothing_{\parallel} of the - collimated beam.

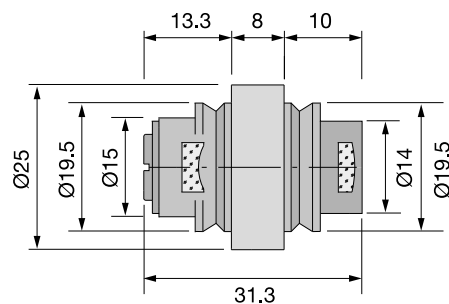

TECHNICAL DATA

5AN-2.5-V-08

| | | |
|------------------|-----------------------|-----------------------|
| Series | 5AN | |
| Order Code | 5AN-2.5-V-08 | |
| Form factor | 0.4 | |
| AR coating | 08 | |
| Wavelength range | 980 - 1550 nm | |
| Clear aperture | \varnothing 5 mm | |
| Mount | System mount | System mount |
| | \varnothing 19.5 mm | \varnothing 19.5 mm |
| Outer diameter | \varnothing 25 mm | |
| Housing material | Nickel silver / steel | |
| Weight | 68 g | |

TECHNOTES

- [Astigmatism Correction](#)
[Astigmatism Correction using anamorphic beam-shaping optics type 5AN](#)
- [Beam-shaping and fiber coupling](#)
[Using anamorphic optics to increase coupling efficiency](#)

DOWNLOADS



[930210390401.pdf \(Dimensional drawing\)](#)

ACCESSORIES

| | |
|--------------|---|
| 60EX-5 | Eccentric key with a stroke of ± 1.0 mm. |
| 9D-12 | Screwdriver WS 1.2 |
| 19.5AM25-L | Adapter for 60SMS Laser Beam Couplers Outer diameter \varnothing 25/28 mm |
| 48MC-MP-19.5 | Mounting plate for the Schäfter+Kirchhoff multicube™ system |

This is a printout of the page https://sukhamburg.com/products/details/5AN-2_5-V-08 from 5/4/2024

CONTACT

For more information please contact:

Schäfter + Kirchhoff GmbH

Kieler Str. 212

22525 Hamburg

Germany

Tel: +49 40 85 39 97-0

Fax: +49 40 85 39 97-79

info@sukhamburg.de

www.sukhamburg.com

LEGAL NOTICE

Copyright 2020 Schäfter+Kirchhoff GmbH. All rights reserved.

Text, image, graphic, sound, video and animation files and their arrangement on Schäfter+Kirchhoff GmbH webpages are protected by copyright and other protective laws. The content may not be copied for commercial use or reproduced, modified or used on other websites. [\[more\]](#)